


Déstratificateurs Thermiques : Vitesses d'Air (m/s) & Niveaux de Bruit (dBA)

10-Pearl

10


Puissance : 12W 0,05A
 Vitesse : 900 tr/mn
 Débit : 540 m³/h

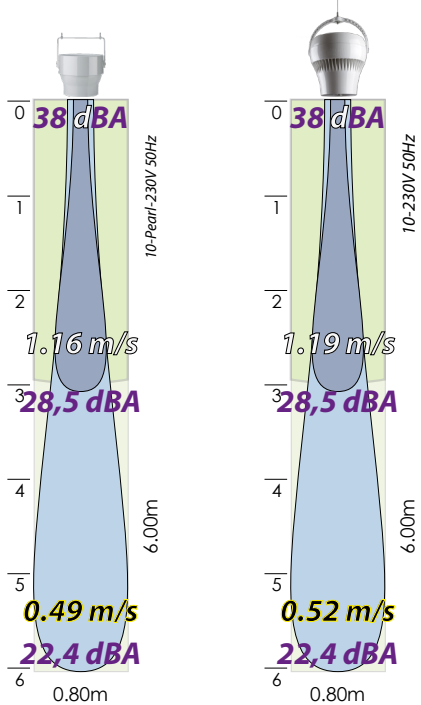

15-Pearl

15


Puissance : 15W 0,06A
 Vitesse : 1.100 tr/mn
 Débit : 690 m³/h

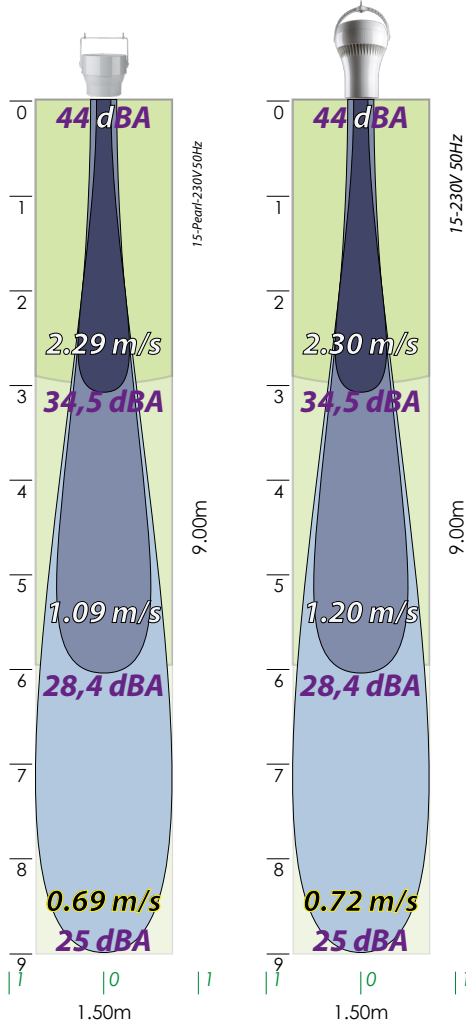

20-Pearl

25


Puissance : 31W 0,13A
 Vitesse : 1.500 tr/mn
 Débit : 780 m³/h
 Pression : 87 Pa

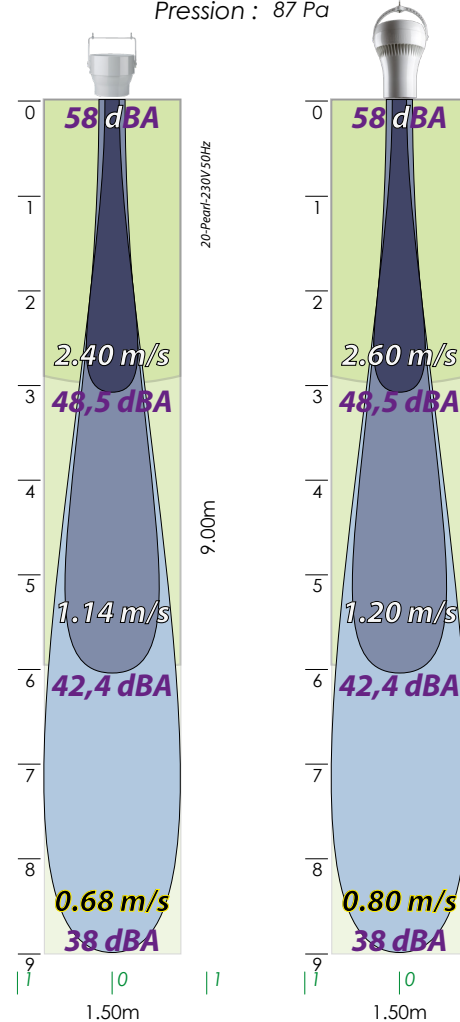

20-Narrow

25-EC


Puissance : 34W 0,28A
 Vitesse : 1.600 tr/mn
 Débit : 1.050 m³/h
 Pression : 36 Pa

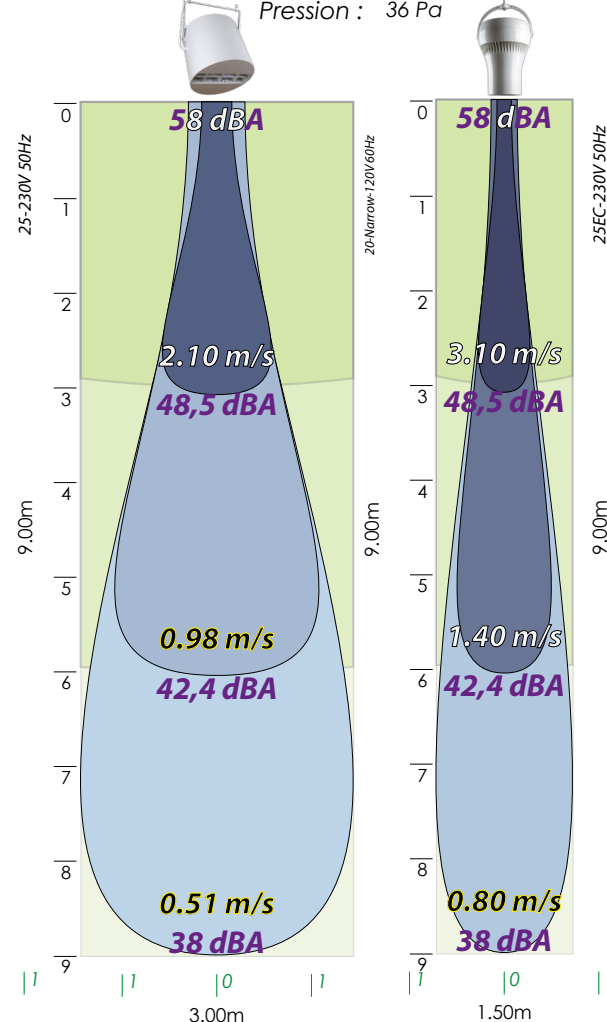




45-P4

42W 0.19A
1.400 tr/mn
1.010 m³/h
80 Pa

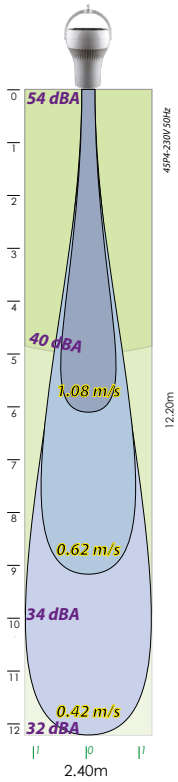


50-P4

72W 0.32A
1.320 tr/mn
1.800 m³/h
60 Pa

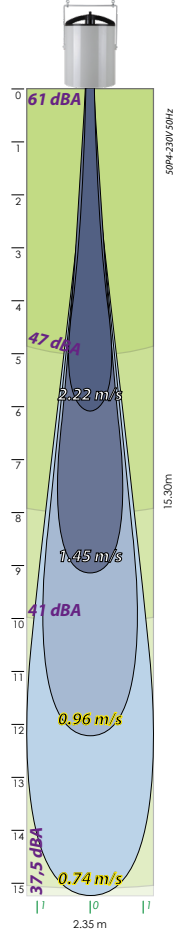


50-EC

98W 0.80A
1.660 tr/mn
2.375 m³/h
80 Pa

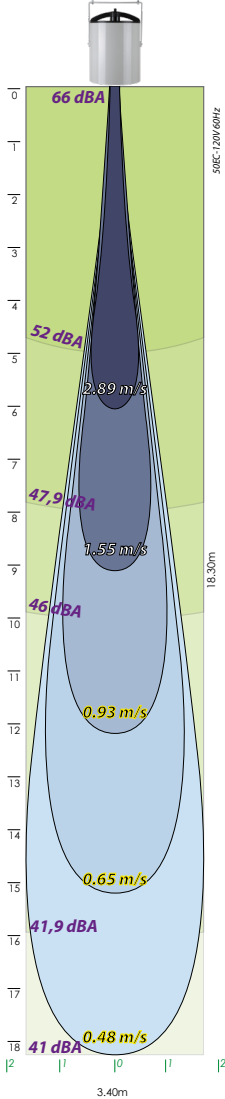


45-P2

115W 0.51A
2.450 tr/mn
1.820 m³/h
120 Pa

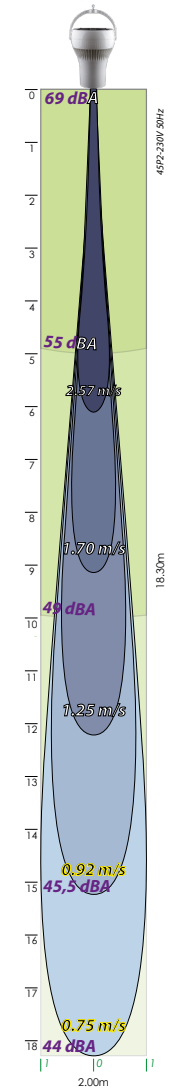


45-EC

175W 1.40A
3.050 tr/mn
2.195 m³/h
210 Pa

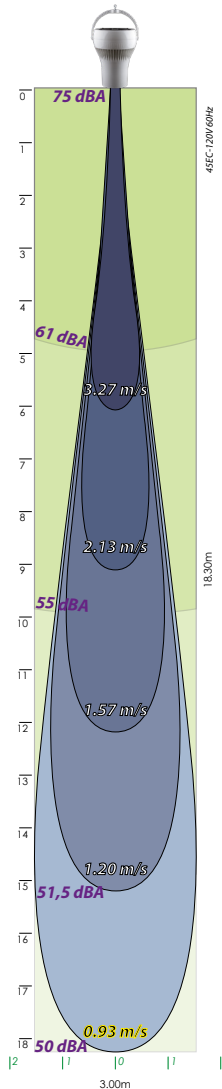


60-P4

Puissance : 120W 0.57A
Vitesse : 1.390 tr/mn
Débit : 2.830 m³/h
Pression : 90 Pa

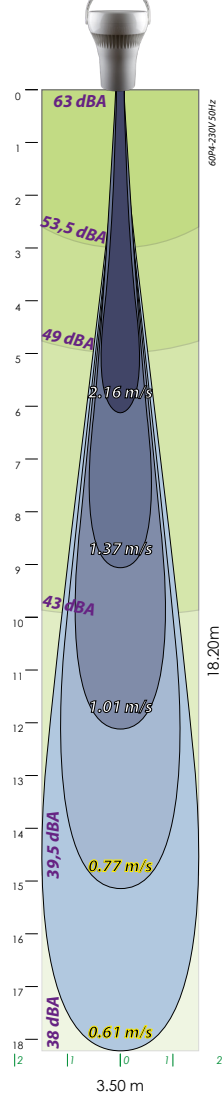


75-P4

Puissance : 160W 0.71A
Vitesse : 1.430 tr/mn
Débit : 4.240 m³/h
Pression : 150 Pa

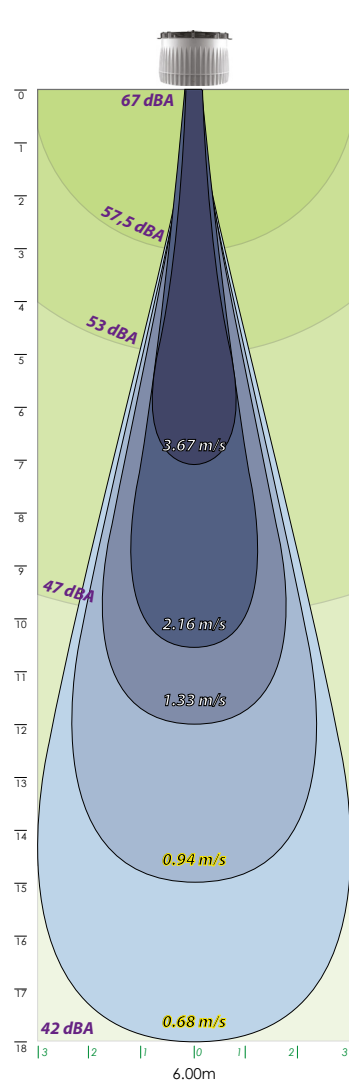


75-EC

Puissance : 390W 2.50A
Vitesse : 1.690 tr/mn
Débit : 5.705 m³/h
Pression : 180 Pa

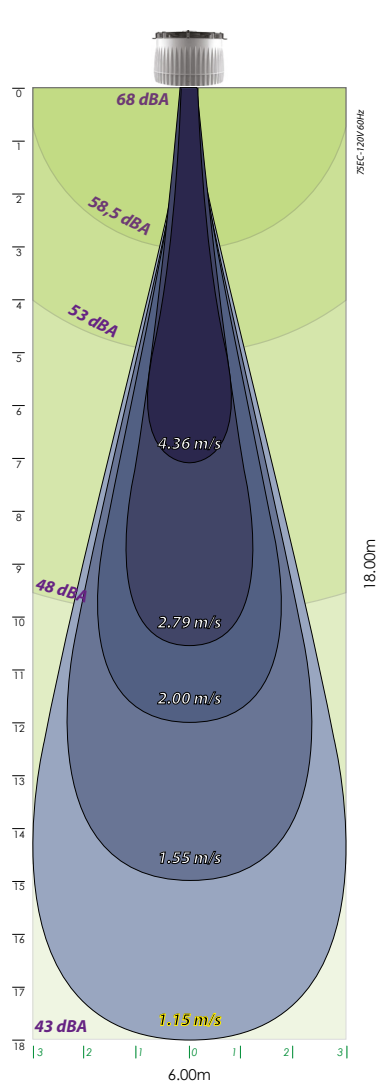


60-EC

Puissance : 170W 1.30A
 Vitesse : 1.630 tr/mn
 Débit : 3.005 m³/h
 Pression : 120 Pa

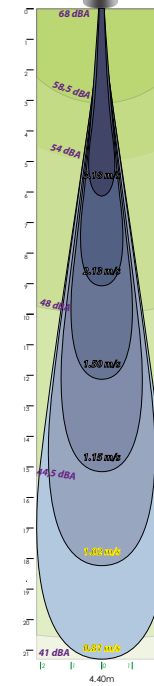

100-EC

Puissance : 390W 2.50A
 Vitesse : 1.690 tr/mn
 Débit : 5.705 m³/h
 Pression : 180 Pa

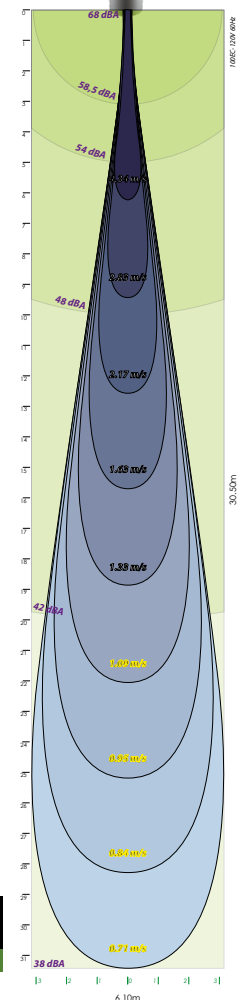

Modèle AIRIUS	Bruit à 1 m dBA	Niveaux de Bruit (dBA) en fonction de la Distance (m)																																					
		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36			
10		32,0	28,5	26,0	24,0	22,4	21,1	19,9																															
10-Pearl	38	62,0	58,5	56,0	54,0	52,4	51,1	49,9																															
15		38,0	34,5	32,0	30,0	28,4	27,1	25,9																															
15-Pearl	44	38,0	34,5	32,0	30,0	28,4	27,1	25,9																															
25		52,0	48,5	46,0	44,0	42,4	41,1	39,9	38,9	38,0																													
20-Pearl	58	52,0	48,5	46,0	44,0	42,4	41,1	39,9	38,9	38,0																													
25EC	58	52,0	48,5	46,0	44,0	42,4	41,1	39,9	38,9	38,0																													
20-Narrow	58	52,0	48,5	46,0	44,0	42,4	41,1	39,9	38,9	38,0																													
45P4	54	48,0	44,5	42,0	40,0	38,4	37,1	35,9	34,9	34,0	33,2	32,4	31,7	31,1	30,5																								
45P2	69	63,0	59,5	57,0	55,0	53,4	52,1	50,9	49,9	49,0	48,2	47,4	46,7	46,1	45,5	44,9	44,4	43,9	43,4	43,0																			
45EC	75	69,0	65,5	63,0	61,0	59,4	58,1	56,9	55,9	55,0	54,2	53,4	52,7	52,1	51,5	50,9	50,4	49,9	49,4	49,0																			
50P4	61	52,0	48,5	46,0	44,0	42,4	41,1	39,9	38,9	38,0	37,2	36,4	35,7	35,1	34,5	33,9	33,4	32,9	32,4	32,0																			
50EC	66	52,0	48,5	46,0	44,0	42,4	41,1	39,9	38,9	38,0	37,2	36,4	35,7	35,1	34,5	33,9	33,4	32,9	32,4	32,0																			
60P4	63	57,0	53,5	51,0	49,0	47,4	46,1	44,9	43,9	43,0	42,2	41,4	40,7	40,1	39,5	38,9	38,4	37,9	37,4	37,0																			
60EC	68	62,0	58,5	56,0	54,0	52,4	51,1	49,9	48,9	48,0	47,2	46,4	45,7	45,1	44,5	43,9	43,4	42,9	42,4	42,0	41,6	41,2																	
75P4	67	61,0	57,5	55,0	53,0	51,4	50,1	48,9	47,9	47,0	46,2	45,4	44,7	44,1	43,5	42,9	42,4	41,9	41,4	41,0	40,6	40,2																	
75EC	68	62,0	58,5	56,0	54,0	52,4	51,1	49,9	48,9	48,0	47,2	46,4	45,7	45,1	44,5	43,9	43,4	42,9	42,4	42,0	41,6	41,2																	
100EC	66	62,0	58,5	56,0	54,0	52,4	51,1	49,9	48,9	48,0	47,2	46,4	45,7	45,1	44,5	43,9	43,4	42,9	42,4	42,0	41,6	41,2	40,8	40,4	40,0	39,7	39,4	39,1	38,8	38,5	38,2	37,9	37,6	37,4					
125EC	67	61,0	57,5	55,0	53,0	51,4	50,1	48,9	47,9	47,0	46,2	45,4	44,7	44,1	43,5	42,9	42,4	41,9	41,4	41,0	40,6	40,2	39,8	39,4	39,0	38,7	38,4	38,1	37,8	37,5	37,2	36,9	36,6	36,4	36,1	35,9			

FP190-FR-01